


ALLOCATION TO ASSEMBLIES			DELIVERY TO:
Assembly Mark		TOTAL	SITE
B-1B4	1	13	
B-1B5	1		
B-1B6	1		
B-1B7	1		
B-1B25	2		
B-1B30	1		
B-1B32	2		
B-1B33	1		
B-1B34	1	1	
B-1B42	1		
B-1B48	1		
Total	13		

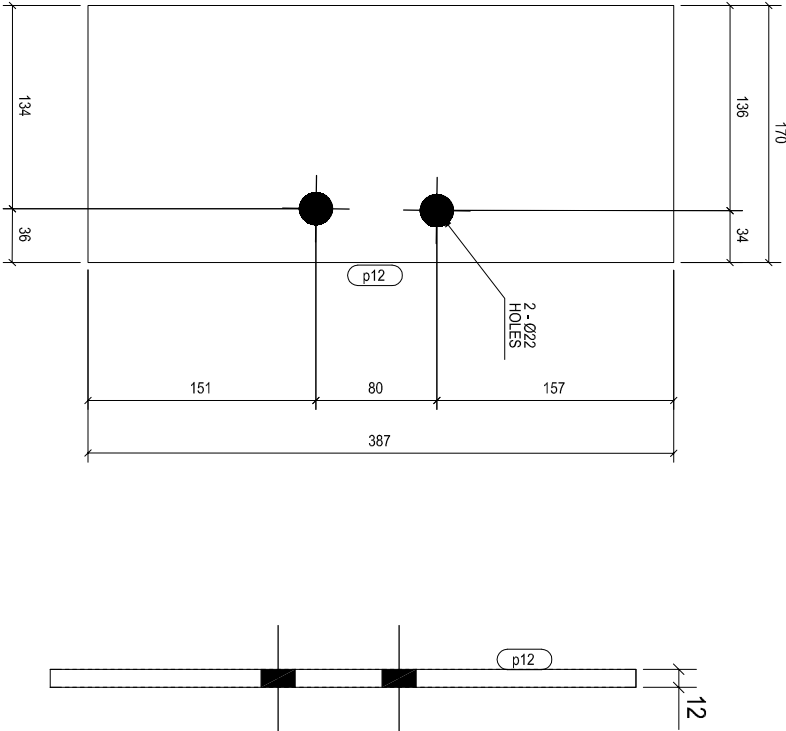

STEEL	CUTTING TOL.: +/- 1mm	ACCU. TOL.: +/- 1mm	FAB. TOL.: +/- 1mm				
ALUM.	CUTTING TOL.: +/- 0.5mm	ACCU. TOL.: +/- 0.5mm	FAB. TOL.: +/- 0.5mm				
QTY.:	MATERIAL:		FINISH:				
13	S275 JO TO BS EN10025		GALV. TO BS ENISO 1461, ONE UNDER COAT & 2 FINISH COATS		WEIGHT:	6.2 KGS	
LOCATION:	DRAWN:	DATE:	CHECKED:	DATE:	SCALE:	1:5	
					PROJECT NAME:		
					CONTRACT 803 NAM FUNG PROTAL TO ABERDEEN CHANNEL BRIDGE NOISE BARRIER - VIADUCT B		
					SHOP DRAWING REF.:		DWG No.
					ERECTION DRAWING REF.:		
					F-ST-B- p12		REV
							A

1	p12	PL12x170	13	NOS.	387	
NO.	NAME	PARTS	QTY.	UNIT	LENGTH (mm)	REMARK

PROJECT NO.:	ITEM / PART NO.
E2066	p12